

LEGEND


XP WATER HEATERS XWH (1000-3400) - ONE WATER HEATER/HORIZONTAL STORAGE TANK RECOVERY SYSTEM (ONE TEMPERATURE)

<u>CAUTION:</u> THIS DRAWING SHOWS SUGGESTED
PIPING CONFIGURATION AND OTHER DEVICES;
CHECK WITH LOCAL CODES AND ORDINANCES
FOR ADDITIONAL REQUIREMENTS.

-\frac{\diag}{1}	TEMPERATURE & PRESSURE RELIEF VALVE	Б	FULL PORT BALL VALVE
-\$	PRESSURE RELIEF VALVE		CHECK VALVE
	CIRCULATING PUMP		TEMPERATURE GAGE
\Diamond	TEMPERATURE CONTROL PROBE		WATER FLOW SWITCH

☐ DRAIN

XP WATER HEATER MODEL (XWH)	WATER HEATER PIPING SIZE (INCH)
1000-1300	2"
1700	2-1/2"
2000	3"
2600	3"
3400	4"
·	

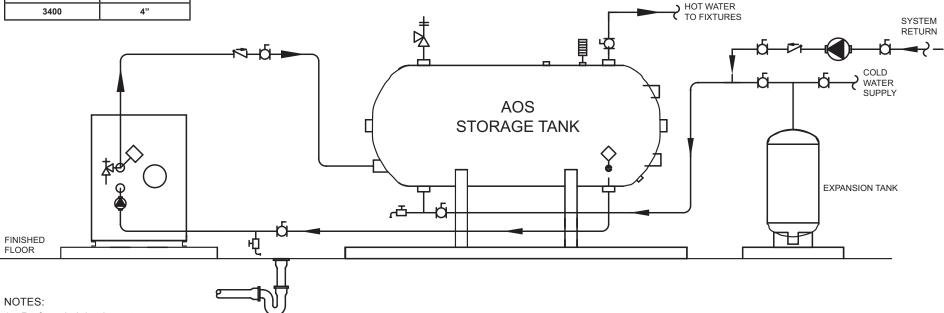

- 1. Preferred piping layout.
- 2. The temperature and pressure relief valve setting shall not exceed pressure rating of any component in the system.
- 3. Service valves are shown for servicing water heater. However, local codes shall govern their usage.
- 4. A. O. Smith piping method is based on the 50 equivalent feet of piping. Water heater placement shall be as close as practical to the storage tank. Applications in excess of these recommendations shall require a licensed engineer for design assistance.