


MODEL NO.	L	W	Ds	Hs	Db	Hb
C47-CX14-20	38	18	14	77	18	40
C47-CX16-20	46	24	16	77	24	41
C47-CX18-20	48	24	18	80	24	50
C47-CX21-20	51	24	21	74	24	50
C47-CX24-20	60	30	24	81	30	50
C47-CX30-20	70	30	30	101	39	48

X-1 = CR-100 MEDIA
X-2 = CR-200 MEDIA

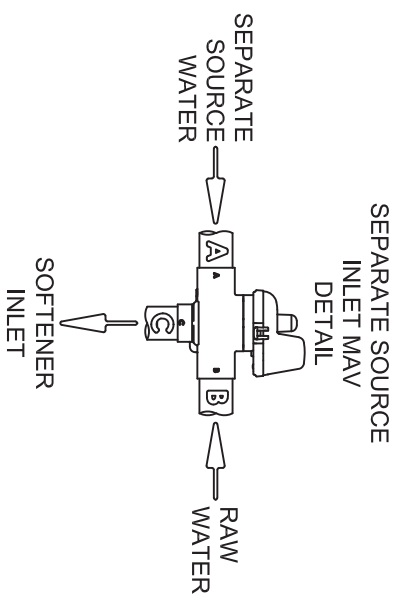

- NOTES:
- 1) VALVE INLET AND OUTLET CONNECTIONS ARE 2" NPTF.
 - 2) VALVE DRAIN CONNECTION IS 1-1/2" NPTF.
 - 3) PIPE, FITTINGS AND ISOLATION VALVES ARE NOT FURNISHED.
 - 4) IT IS RECOMMENDED THAT FLEXIBLE CONNECTORS BE INSTALLED BETWEEN HARD PIPING AND VALVE INLET AND OUTLET CONNECTIONS.
 - 5) THE TANK MANUFACTURER RESERVES THE RIGHT TO INVALIDATE THE TANK WARRANTY IF FLEXIBLE CONNECTORS ARE NOT INSTALLED PER NOTE 4.

SCALE	NTS	
DATE	3-1-24	
DRAWN	GRBauer	DRAWING NO. C47 SINGLE w/ SEP SOURCE
CHECKD	GRB	
APPRD.	GRB	SHEET 1 OF 1