
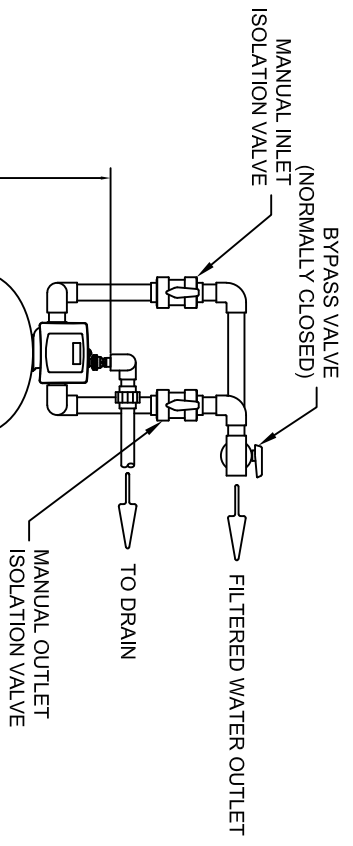


| MODEL NO. | L | W | Df | Hf |
|-------------|----|----|----|----|
| C53-XX14-15 | 15 | 15 | 14 | 72 |
| C53-XX16-15 | 17 | 17 | 16 | 72 |
| C53-XX18-15 | 19 | 19 | 18 | 75 |
| C53-XX21-15 | 22 | 22 | 21 | 75 |
| C53-XX24-15 | 25 | 25 | 24 | 82 |

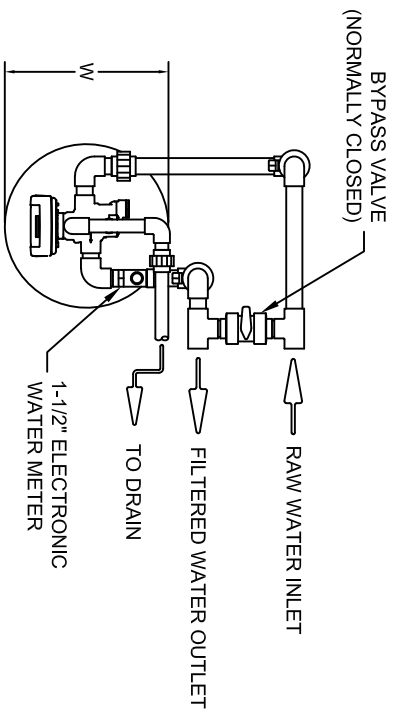

- NOTES:
- 1) VALVE INLET AND OUTLET CONNECTIONS ARE 1.5" NPTF.
 - 2) VALVE DRAIN CONNECTION IS 1-1/4" NPTF.
 - 3) PIPE AND FITTINGS ARE NOT FURNISHED.
 - 4) IT IS RECOMMENDED THAT FLEXIBLE CONNECTORS BE INSTALLED BETWEEN HARD PIPING AND VALVE INLET AND OUTLET CONNECTIONS.
 - 5) THE TANK MANUFACTURER RESERVES THE RIGHT TO INVALIDATE THE TANK WARRANTY IF FLEXIBLE CONNECTORS ARE NOT INSTALLED PER NOTE 4.

| | | |
|-------------|-----------------|---|
| SCALE | NTS | LAYOUT DRAWING C53 SERIES - SINGLE |
| DATE | 06-01-20 | |
| DRAWN | GRBauer |  |
| CHKD | GRB | |
| APPRD. | GRB | |
| DRAWING NO. | C53 1.5" SINGLE | REV. |
| SHEET | 1 OF 1 | 0 |